




# Diamond Tools

Construction applications

# Ring Saw



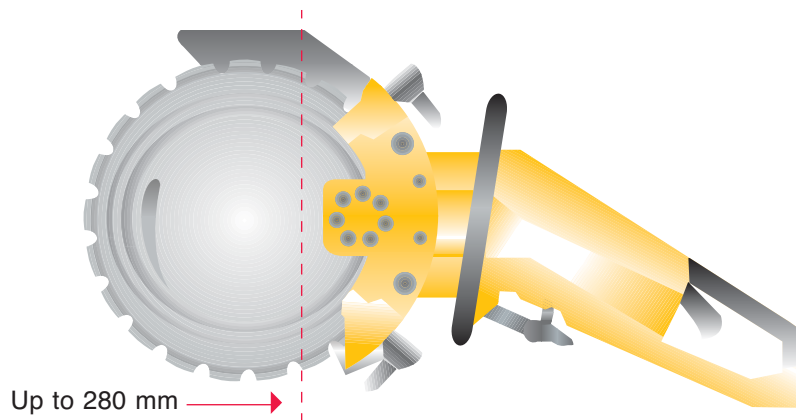

## Ring Saw

Toolgal manufactures a series of special blades for this unique machine, which allows a cutting depth of up to 280 mm. Specific blades are available for heavily reinforced concrete, standard concrete, flint aggregate and abrasive concrete.

The blades are customarily ordered by color (though not in fact painted) to help the customer with the different applications.

Material	Colour Code
Heavy Reinforced Concrete	Blue
Flint Concrete	Green
Standard Concrete	Yellow
Abrasive/Masonry	Red

The blades are all 355 mm and are laser welded. Standard thickness is 4.3 mm But 5.5 mm Can be ordered. Water cooling is recommended at all times.